




## GRAPHIX

**DESCRIPTION:** Wall double-sided **TEXTURE:** Smooth & Split face

### PALLET OVERVIEW











### COMPATIBLE CAPS

See page 141 for product compatibility.

### NOTES

See page 136 to 157 for more technical information.

Specifications per pallet	Imperial	Metric
Cubing	<b>26.25 ft<sup>2</sup></b>	2.44 m <sup>2</sup>
	107.67 lin. ft	32.51 m lin.
Approx. Weight	2 773 lbs	1 258 kg
Number of rows	8	
Coverage per row	3.28 ft <sup>2</sup>	0.30 m <sup>2</sup>
Linear coverage per row	13.33 lin. ft	4.06 lin. m

	Unit dimensions	in	mm	Units/pallet
 <b>1</b>	Height	2 15/16	75	8 units
	Depth	9 1/16	230	
	Length	20	508	
 <b>2</b>	Height	2 15/16	75	8 units
	Depth	10 1/16	255	
	Length	20	508	
 <b>3</b>	Height	2 15/16	75	8 units
	Depth	11	280	
	Length	20	508	
 <b>4</b>	Height	2 15/16	75	8 units
	Depth	8 1/16	205	split on one side
	Length	20	508	
 <b>1A</b>	Height	2 15/16	75	8 units
	Depth	9 1/16	230	Left corner unit
	Length	20	508	
 <b>2A</b>	Height	2 15/16	75	8 units
	Depth	10 1/16	255	Right corner unit
	Length	20	508	
 <b>3A</b>	Height	2 15/16	75	8 units
	Depth	11	280	Left corner unit
	Length	20	508	
 <b>4A</b>	Height	2 15/16	75	8 units
	Depth	8 1/16	205	Right corner unit, split on one side
	Length	20	508	

Beige Cream




Greyed Nickel

Onyx Black






CLEAN SAND/GRAVEL/ SAND AND GRAVEL MIXES ( $\phi=34^\circ$ ,  $\gamma = 120$  pcf)  
GEOGRID: MIRAGRID 2XT BY TENCATE (RFd=1.10, RFcr=1.45, RFid=1.25, Cds=0.9, Ci=0.9)

**CASE N° 1 :**  
No Surcharge  
No Backslope  
No Toe Slope

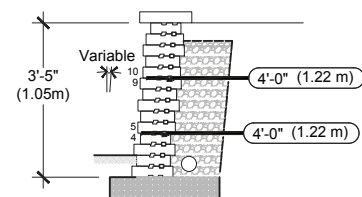


VISIT [WWW.TECHO-BLOC.COM](http://WWW.TECHO-BLOC.COM) FOR COMPLETE DESIGN CHART DOCUMENT

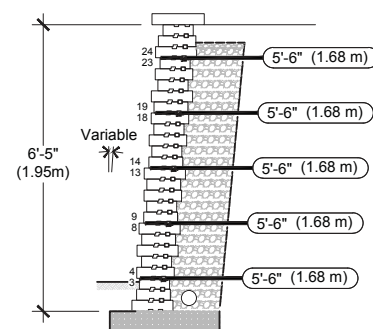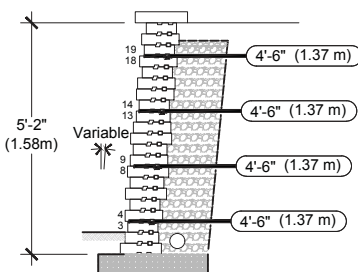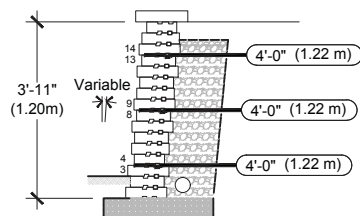

1. The information contained in the design charts is supplied for information purposes only and as such should only be used for preliminary designs.
2. The height (H) of the wall is the total height from the leveling pad to the top of the wall not including the thickness of the cap.
3. Soil parameters: reinforced soil ( $\phi = 34^\circ$ ,  $\gamma = 120$  pcf); retained soil ( $\phi = 34^\circ$ ,  $\gamma = 120$  pcf); foundation soil ( $\phi = 34^\circ$ ,  $\gamma = 120$  pcf)
4. A qualified engineer should be consulted for the final design to be used for construction.
5. The foundation soil must be able to support the wall system. The bearing capacity of the foundation soil, settlement, and global stability must be verified and validated by a qualified geotechnical engineer.
6. The seismic analysis is not included.
7. The design charts do not apply to tiered walls.
8. The charts assume that the walls are constructed in accordance with Techo-Bloc specifications, good construction practice and an adequate drainage system.
9. The geogrid layout has been optimized to satisfy the design requirements of the NCMA's Design Manual for Segmental Retaining Walls, 3rd Edition.
10. The minimum burial depth must be 6 in (150 mm) or 10% of the exposed height, whichever is greater.
11. Engineering judgement should be used when interpolating between heights.
12. Techo-Bloc and its predecessors, successors, beneficiaries, employees, associates, administrators and insurers accepts no liability for the incorrect use of information contained in the design charts.
13. For further information, please contact our technical service department.

# INSTALLATION GUIDE


## FREESTANDING WALLS - GRAPHIX

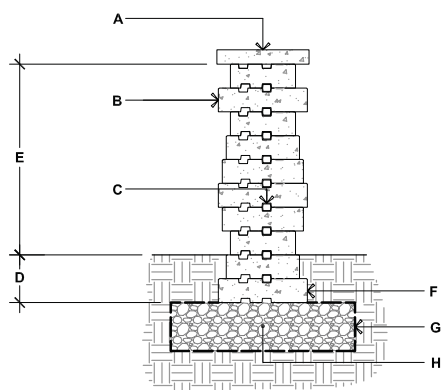

### GRAPHIX



- A.** TECO-BLOC CAP UNIT SECURED TO UNIT BELOW WITH FLEXLOCK ADHESIVE
- B.** GRAPHIX DOUBLE-SIDED WALL UNITS SECURE EACH ROW WITH FLEXLOCK ADHESIVE
- C.** CONNECTOR
- D.** EMBEDMENT DEPTH, 6" (150 mm) MIN.
- E.** 23 1/2" (600 mm) MAX.
- F.** FOR THE FIRST ROW, ALWAYS USE THE DEEPER GRAPHIX BLOCK
- G.** GEOTEXTILE
- H.** COMPACTED GRANULAR LEVELING PAD, 6" (150 mm) THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS

## 90° CORNER OF A DOUBLE-SIDED WALL

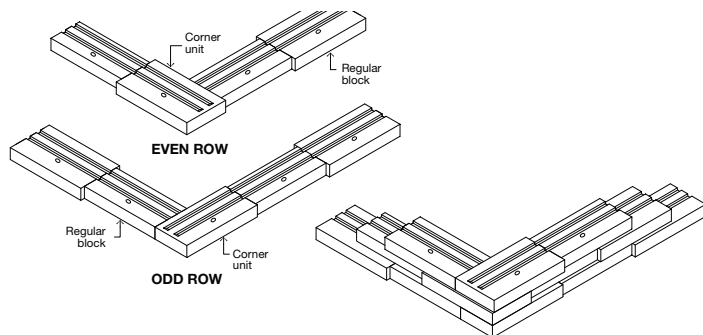

1. Alternate odd and even rows.
2. Stagger joints from one row to the next.
3. Glue all modules at each row with Flexlock adhesive.
4. Connectors are not illustrated to avoid overloading the image.
5. It is possible to alternate the blocks (1, 2, 3 or 4) in the same row to create different patterns. However, a corner block (1A, 2A, 3A or 4A) must always be present at the end of a row and must be alternated for each subsequent row.
6. At the corner, make sure to place the blocks so that the grooves of the block cannot be seen.

## DOUBLE-SIDED WALL - END OF A STRAIGHT WALL

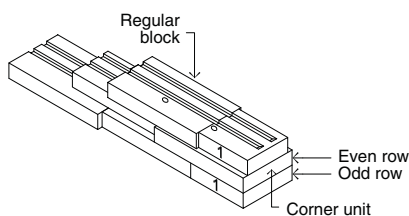


\* It is possible to alternate the blocks (1, 2, 3 or 4) in the same row to create different patterns. However, a corner block and a cut corner block (1A, 2A, 3A or 4A) must always be present at the end of a row and must be alternated for each subsequent row.

PLEASE REFER TO P.4 FOR THE CORRECT USE AND LIMITATIONS OF PROVIDED TECHNICAL INFORMATION.

# INSTALLATION GUIDE

## PILLARS - GRAPHIX

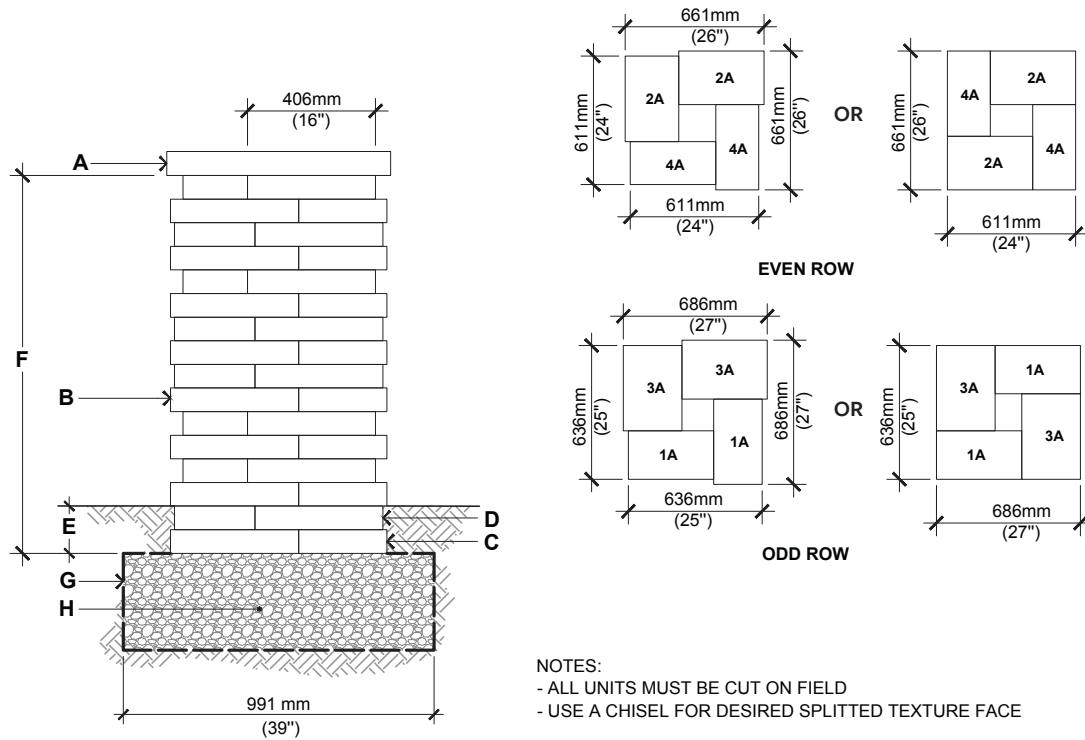

### GRAPHIX

- A.** PILLAR CAP UNIT (SECURE WITH FLEXLOCK ADHESIVE)
- B.** GRAPHIX CORNER UNIT  
SECURE EACH ROW WITH FLEXLOCK ADHESIVE  
CUT EACH BLOCK AT 16" (406 mm) FROM THE CORNER EDGE
- C.** USE THE BLOCKS 1A-3A FOR THE ODD ROWS
- D.** USE THE BLOCKS 2A-4A FOR THE EVEN ROWS
- E.** EMBEDMENT DEPTH 6" (150 mm) MIN.
- F.** 23 <sup>5</sup>/<sub>8</sub>" (600 mm ) HEIGHT PER PALLET  
47 <sup>1</sup>/<sub>4</sub>" (1200 mm) MAXIMUM HEIGHT
- G.** GEOTEXTILE
- H.** COMPACTED GRANULAR BASE 6" (150 mm) THICK MIN. THICKNESS  
ACCORDING TO PROJECT SPECIFIC CONDITIONS

For all possible combinations of pillars and caps, please refer to the correspondence table on page 141