BRANDON RECTANGULAR FIRE PIT

T TECHO-BLOC WARRANTY APPLIES TO BRANDON STONES
THE WARRANTY **DOES NOT APPLY** TO ACCESSORY KIT

NOTES

Sold as a kit not pre-assembled.
Raffinato 14″ x 28″ caps included.

Techo-Bloc is not responsible for any damages to the firepit if it is not installed with a sleeve or accessory kit. The firepit is not designed for large fires. Fire should be contained at least 6" away from the firepit wall blocks. Overheating could lead to heat damage to the firepit components.

*For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.

See 112 for more technical information.

Specifications per pallet	Imperial	Metric
Cubing	**58 units**	58 units
Approx. Weight	2 660 lbs	1 207 kg
Overall Height	19 15/16 in	507 mm
Overall Width	44 ½ in	1 130 mm
Overall Length	57 ¾ in	1 467 mm
Brandon 90 mm units	20 C units	
Brandon 90 mm corner units	30 units	
Cap units	8 units	

Insert

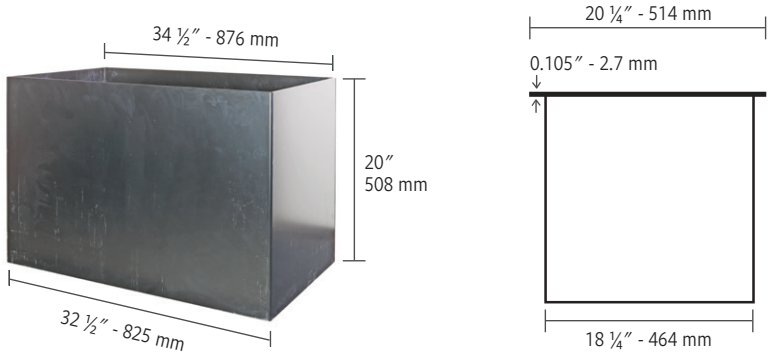

Gas Insert

Gas insert kits available and sold separately (Natural Gas or Liquid Propane).

The kit includes: Brass Burner (160K BTU), Aluminum Plate, Ignition control (push button), collars, vents, aluminum cover and black lava rock.

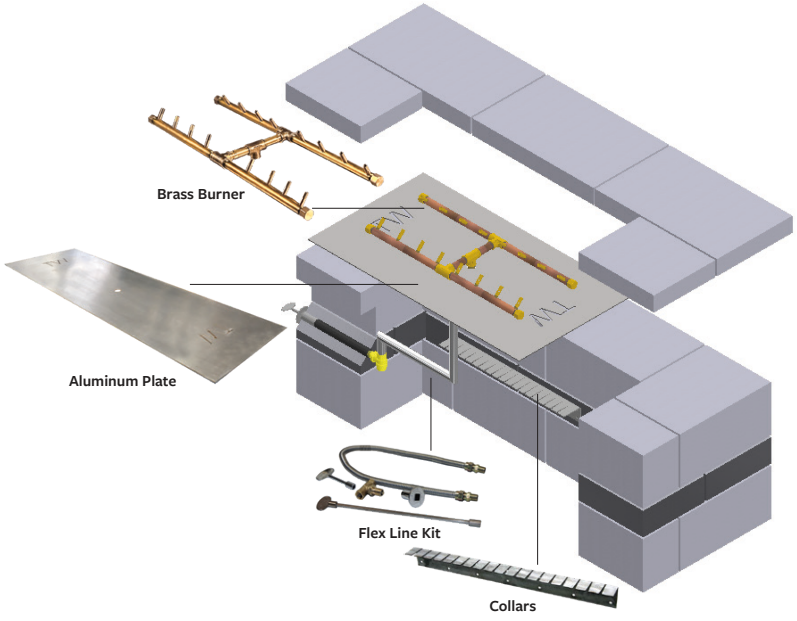

Chestnut Brown

FIRE PIT
Chestnut Brown

CAP
Chestnut Brown

Shale Grey

FIRE PIT
Shale Grey

CAP
Shale Grey

INSTALLATION GUIDE

BRANDON RECTANGLE, FIRE PIT (KIT)

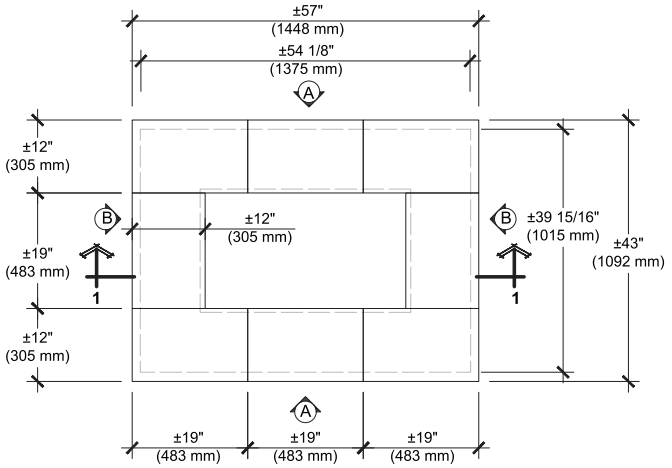

TOP

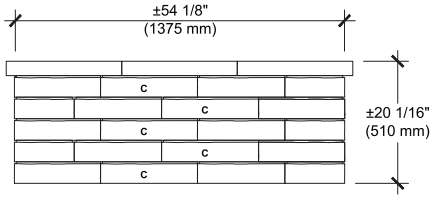

ELEVATION A



ELEVATION B

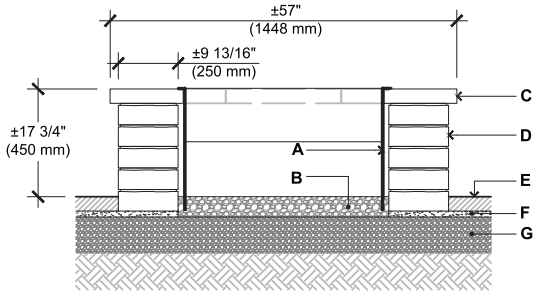

SECTION 1-1

A. STEEL BOX INSERT
B. CLEAN STONE ¾″ (20 mm), 4″ (100 mm) THICK
C. RAFFINATO CAP 60 mm (PRE-CUT)
D. BRANDON 90 mm BLOCK
E. TECHO-BLOC PAVERS OR SLABS
F. SETTING BED 1″ (25 mm)
G. COMPACTED GRANULAR BASE 0-¾″ (0-20 mm)
H. BRANDON 90 mm CORNER BLOCK

Consult our Installation Guide in our website for a detail step by step installation.

QUANTITY OF MATERIALS REQUIRED

- RAFFINATO CAP 60 mm: 8
- Brandon 90 mm block C : 20
- Brandon 90 mm corner block: 30

NOTE : Secure the blocks using a heat resistant concrete adhesive. The installer must ensure that the installation and use of the fire pit comply with local regulations and code requirements.

PLEASE REFER TO P.4 FOR THE CORRECT USE AND LIMITATIONS OF PROVIDED TECHNICAL INFORMATION.

BRANDON SQUARE FIRE PIT

TECHO-BLOC WARRANTY APPLIES TO BRANDON STONES
THE WARRANTY **DOES NOT APPLY** TO ACCESSORY KIT

NOTES

Sold as a kit not pre-assembled.
Raffinato 14″ x 28″ caps included.

Techo-Bloc is not responsible for any damages to the firepit if it is not installed with a sleeve or accessory kit. The firepit is not designed for large fires. Fire should be contained at least 6" away from the firepit wall blocks. Overheating could lead to heat damage to the firepit components.

*For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.

See 114 for more technical information.

Specifications per pallet	Imperial	Metric
Cubing	**66 units**	66 units
Approx. Weight	2 454 lbs	1113 kg
Overall Height	19 15/16 in	507 mm
Overall Width	53 ½ in	1 359 mm
Overall Length	53 ½ in	1 359 mm
Brandon 90 mm units	20 A units	20 B units
Brandon 90 mm corner units	20 units	
Cap units	6 units	

Insert

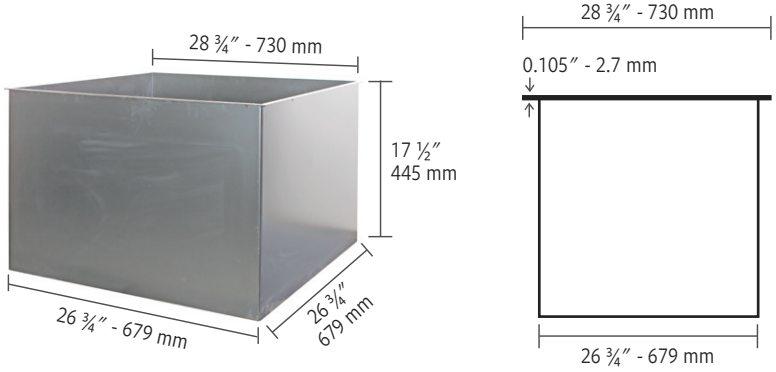

Gas Insert

Gas insert kits available and sold separately (Natural Gas or Liquid Propane).

The kit includes: Brass Burner (240K BTU), Aluminum Plate, Ignition control (push button), collars, vents, aluminum cover and black lava rock.

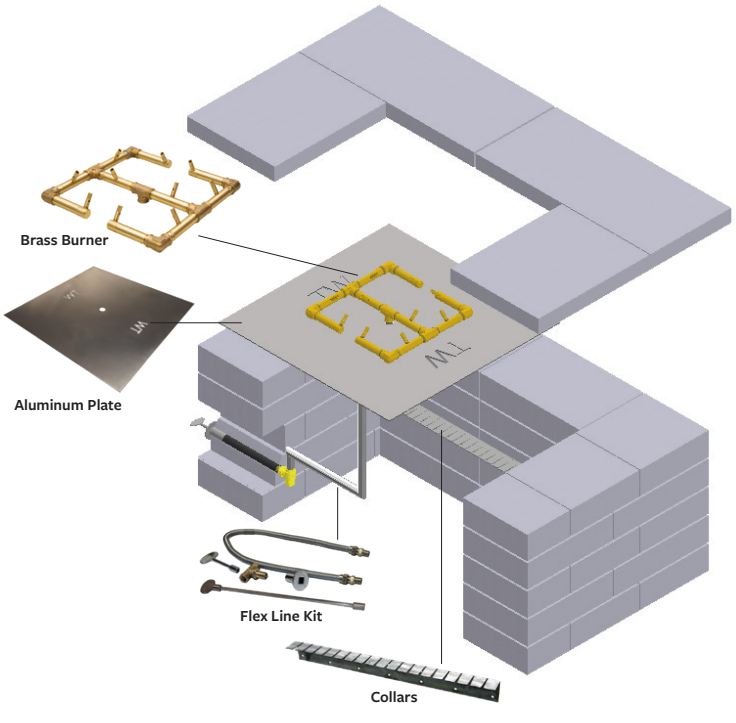

Chestnut Brown

FIRE PIT
Chestnut Brown

CAP
Chestnut Brown

Shale Grey

FIRE PIT
Shale Grey

CAP
Shale Grey

INSTALLATION GUIDE

BRANDON SQUARE, FIRE PIT (KIT)

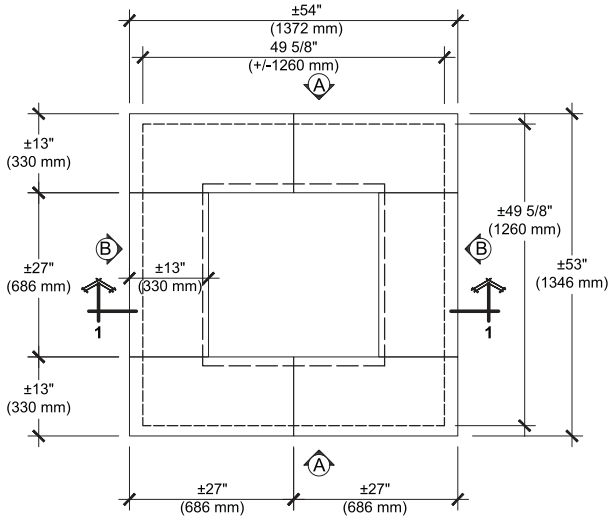

TOP

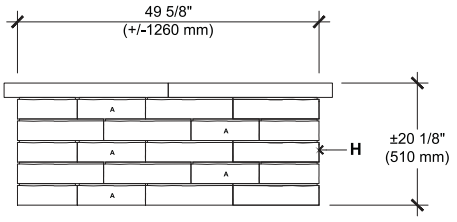

ELEVATION A

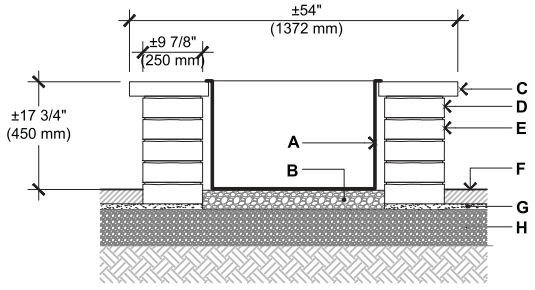

SECTION 1-1

A. STEEL BOX INSERT

B. CLEAN STONE ¾″ (20 mm), 4″ (100 mm) THICK

C. RAFFINATO CAP 60 mm (PRE-CUT)

D. BRANDON 90 mm BLOCK

E. TECHO-BLOC PAVERS OR SLABS

F. SETTING BED 1″ (25 mm)

G. COMPACTED GRANULAR BASE 0-¾″ (0-20 mm)

H. BRANDON 90 mm CORNER BLOCK

QUANTITY OF MATERIALS REQUIRED

- RAFFINATO CAP 60 mm: 6
- Brandon 90 mm block: 20 A , 20 B
- Brandon 90 mm corner block: 20

NOTE : Secure the blocks using a heat resistant concrete adhesive. The installer must ensure that the installation and use of the fire pit comply with local regulations and code requirements.

Consult our Installation Guide in our website for a detail step by step installation.

PLEASE REFER TO P.4 FOR THE CORRECT USE AND LIMITATIONS OF PROVIDED TECHNICAL INFORMATION.